16D32 Drop Deck Trailer Manufacturing ISO Registered 9001:2000 Since 1978, G&H Manufacturing has



Since 1978, G&H
Manufacturing has
engineered exceptional
products for the waste
and recycling industry.
We manufacture the #1
most requested hoist
in the industry.

Innovative designs are combined with cutting edge technology and genuine craftsmanship, exceeding all industry standards and providing unsurpassed quality and assurance.




Standard Features

ABS Brakes
Safety Prop
Poly Fenders
D.O.T. Lighting
Mid-Turn Signals
Ratchet Tie Downs
Spring Suspension
Two Speed Landing Gear
Dual Outboard Cylinders
Axles 5 X 5/8" Wall (25,000 lb capacity)
Low Profile Tire on Hub Piloted Budd Wheels

Available Options

Dead Lift Air Lift Axle Extendable Tail Drop In Stops Fold Up Stops (Locking) Tool Box 24", 36", or 48" Steel Tread Plate Fenders Inside/Outside Rails

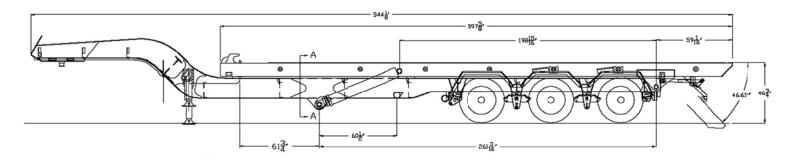

16D32 Drop Deck Trailer Specifications

Cylinders, Reeving	7 in. Bore-Single Stage, Double Acting
Cylinders, Tilt	7 in. Bore-Three Stage, Double Acting
Fenders	Poly Fenders Interchangeable and Replaceable
Tilt Frame Rails	10 in. X 4 in. X 1/2 in. wall
Trailer Main Frame	16 in. 40 lb. Wide Flange I Beam
Controls	Air over Hydraulic
Folding Rear Bumper	Meets ICC Requirements
Tilt Frame Container Rollers	14
Cable Diameter	7/8 in.
Heavy Duty Landing Gear	Two Speed
Rear Hinge	Heavy Duty Rear Hinge
Air Brakes	Meets all D.O.T. Requirements
Lights	Meets all ICC and D.O.T. Requirements
Tie Downs	Ratchet Tie Downs
Wheels	Hub Piloted Budd or Spoke
Tires	255R70/22.5
Rollers and Sheave(s)	All equipped with Aluminum Bronze Bushings and Grease Fittings



